

SUPERDRIVE

FULLY THREADED* WOODSCREWS



BOXES

Code	Finish	Gauge (mm)	Length (mm)	Box Qty	Outer Qty
SPD30012	ZINC & YELLOW PASSIVATED	3.0	12	200	18000
SPD30020		3.0	20	200	18000
SPD30025		3.0	25	200	10000
SPD35012		3.5	12	200	18000
SPD35016		3.5	16	200	18000
SPD35020		3.5	20	200	10000
SPD35025		3.5	25	200	8400
SPD35030		3.5	30	200	8400
SPD35040		3.5	40	200	4800
SPD35050		3.5	50	200	4800
SPD40020		4.0	20	200	8400
SPD40025		4.0	25	200	8400
SPD40030		4.0	30	200	4800
SPD40035		4.0	35	200	4800
SPD40040		4.0	40	200	4800
SPD40045		4.0	45	200	4800
SPD40050		4.0	50	200	2800
SPD40060		4.0	60	200	2800
SPD40070		4.0	70	100	2400
SPD40080		4.0	80	100	2400
SPD50030		5.0	30	200	4800
SPD50040		5.0	40	200	2800
SPD50050		5.0	50	200	2800
SPD50060		5.0	60	100	2400
SPD50070		5.0	70	100	1400
SPD50080		5.0	80	100	1400
SPD50090		5.0	90	100	1400
SPD50100		5.0	100	100	1400
SPD50120		5.0	120	50	600
SPD60050		6.0	50	100	2400
SPD60060		6.0	60	100	1400
SPD60070		6.0	70	100	1400
SPD60080		6.0	80	100	1400
SPD60090		6.0	90	100	1400
SPD60100		6.0	100	100	1400
SPD60120		6.0	120	50	600
SPD60130		6.0	130	50	600
SPD60150		6.0	150	50	600
SPD60180		6.0	180	50	400
SPD60200		6.0	200	50	400


TRADE TUBS

Code	Finish	Gauge (mm)	Length (mm)	Tub Qty	Outer Qty
SPDT40030	ZINC & YELLOW PASSIVATED	4.0	30	1000	4 Tubs
SPDT40040		4.0	40	850	4 Tubs
SPDT40050		4.0	50	640	4 Tubs
SPDT40070		4.0	70	320	4 Tubs
SPDT50050		5.0	50	450	4 Tubs
SPDT50060		5.0	60	350	4 Tubs
SPDT50070		5.0	70	300	4 Tubs
SPDT50080		5.0	80	260	4 Tubs
SPDT50090		5.0	90	240	4 Tubs
SPDT50100		5.0	100	200	4 Tubs
SPDT60060		6.0	60	220	4 Tubs
SPDT60070		6.0	70	200	4 Tubs
SPDT60080		6.0	80	180	4 Tubs
SPDT60100		6.0	100	150	4 Tubs

INDUSTRIAL TUBS

Code	Finish	Gauge (mm)	Length (mm)	Tub Qty	Outer Qty
SPDI50050	ZINC & YELLOW PASSIVATED	5.0	50	1600	1 Tub
SPDI50070		5.0	70	1200	1 Tub
SPDI50080		5.0	80	1000	1 Tub
SPDI50100		5.0	100	800	1 Tub

ZINC & YELLOW PASSIVATED
For all internal and limited external applications

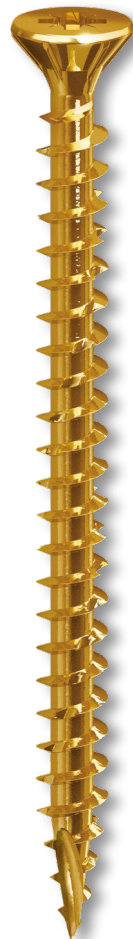

Deep pozi recessed head
for an industry standard fit

Ribbed double countersunk
for a flush finish

Hardened steel
for high torque loads

Zinc & yellow passivated
for indoor use

Wax coating
for easier insertion

Knurled thread
to increase drive speed by up to 20%

40° thread angle
for maximum pull out resistance

*Fully threaded up to 70mm
for maximum holding power


Type 17 point
for easy starting in all timbers



Suitable for use
with an
IMPACT DRIVER



**NOW STOCKING
INDUSTRIAL TUBS**



5 DRIVER BITS
IN EACH
INDUSTRIAL
TUB



www.johngeorge.co.uk



0118 941 1234



sales@johngeorge.co.uk